


DIN 439**EN 24035 / ISO 4035**

Niedrige Sechskantmutter mit Fase (Form B)

Hexagon thin nuts, Form B chamfered

Ecrou bas, Forme B chanfreiné

Låg sexkantmutter, Form B ML6M

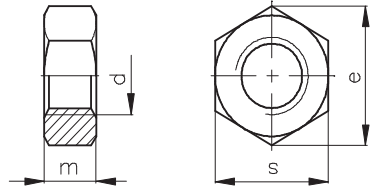

d	M 2	M 2,5	M 3	M 3,5	M 4	M 5	M 6	M 8	M 10	M 12	M 14
P	0,4	0,45	0,5	0,6	0,7	0,8	1	1,25	1,5	1,75	2
s	4	5	5,5	6	7	8	10	13	17	19	22
e _{min}	4,32	5,45	6,01	6,58	7,66	8,79	11,05	14,38	18,9	21,1	24,49
m _{max}	1,2	1,6	1,8	2	2,2	2,7	3,2	4	5	6	7

d	M 16	M 18	M 20	M 22	M 24	M 27	M 30	M 33	M 36	M 39	M 42
P	2	2,5	2,5	2,5	3	3	3,5	3,5	4	4	4,5
s	24	27	30	32	36	41	46	50	55	60	65
e _{min}	26,75	29,56	32,95	35,03	39,55	45,2	50,85	55,37	60,79	66,44	71,3
m _{max}	8	9	10	11	12	13,5	15	16,5	18	19,5	21

Ø		
BM 2	● ○	1000
BM 2,5	● ○	1000
BM 3	● ○	500
BM 4	● ○	500
BM 5	● ○	100
BM 6	● ○	100
BM 8	● ○	100
BM 10	● ○	100
BM 12	● ○	50
BM 14	● ○	50
BM 16	● ○	25
BM 18	● ○	25
BM 20	● ○	25
BM 22	● ○	10
BM 24	● ○	10
BM 27	● ○	10
BM 30	● ○	10
BM 33	● ○	10
BM 36	● ○	10
BM 39	● ○	10

● = A2 ○ = A4

Ein Angebot für nicht aufgeführte Abmessungen und DIN-abweichende Ausführungen erhalten Sie auf Anfrage.

We will be pleased to quote you for any dimensions not listed or non-DIN standard parts.